PRODUCT INFORMATION


| Description | 12-24V LED Heated Work Light with Flood Beam Pattern | |
|----------------------------------|--|--|
| Height | 162.31 mm / 6.39 in | |
| Width | 123.95 mm / 4.88 in | |
| Depth | 52.58 mm / 2.07 in | |
| Shape | Round | |
| Outer Lens Material | Polycarbonate | |
| Outer Lens Color | Clear | |
| Housing Material | Polycarbonate | |
| Housing Color | Black | |
| Mounting Hardware Description | 5/16-18 x 1" Mounting Bolt | |
| Mounting Type | Universal Pedestal Mount | |
| Minimum Operating Temperature | -40 °C / -40 °F | |
| Maximum Operating Temperature | 65 °C / 149 °F | |
| Connector or Wiring | Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P) | |
| Mating Connector | 2-Pin Deutsch Weather-Proof Plug (DT06-2S) | |
| Product Weight | 1.41 lbs / 0.64 kgs | |
| Shipping Weight | 1.41 lbs / 0.64 kgs | |
| | | |



SmartHeat!



PRODUCT DIMENSIONS

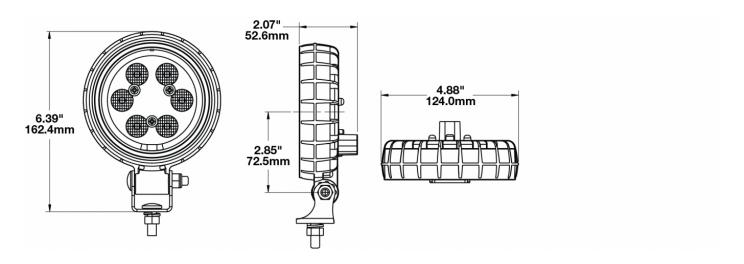

ELECTRICAL SPECIFICATIONS

| Input Voltage | 12-24V DC |
|-------------------|--|
| Operating Voltage | 10-30V DC |
| Red Wire | Positive |
| Black Wire | Negative |
| Current Draw | 1.3A @ 12V DC (Without Heat) 0.6A @ 24V DC (Without Heat) 2.1A @ 12V DC (With Heat) 1.1A @ 24V DC (With Heat) |



REGULATORY STANDARDS COMPLIANCE



Buy America Standards IEC IP67 SAE J1113-13 Eco Friendly IEC IP69K Tested to ECE Reg. 10 (Radiated Emissions only)

PHOTOMETRIC SPECIFICATIONS

| Raw Lumen Output | 1,080 |
|----------------------------------|-------------------------------------|
| Effective Lumen Output | 780 |
| Nominal LED Color Temperature | 5000 K |
| Beam Pattern(s) | Forward Lighting - Flood (Standard) |

APPLICATIONS

Specialty



Truck & Bus



SMARTHEAT™ HEATING SYSTEM

The SmartHeat[™] heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

When does the heater turn off?

Heater will turn off when it senses temperatures increase and are above the high temperature threshold.

Learn more about this technology <u>here</u>.

PRODUCT WARNINGS

For California residents:

WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



Part Number 8200101 Stainless Steel Mounting Kit for Work Lights & Marine Lights



Part Number 8200011 Magnet Mount Kit for XD Series Work Lights



Part Number 8200121 Black Mount Kit for XD Series Work Lights



Print date: 2020-04-24 © 2020 I.W. Speaker Corporation • Ge

© 2020 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

RELATED PRODUCTS



Part Number 1403241 12-24V LED Work Light with Flood Beam Pattern



Part Number 1403251 12-24V LED Work Light with Tranezoid Beam

with Trapezoid Beam Pattern



Part Number 1403261 12-24V LED Work Light with Spot Beam Pattern



Part Number 1403271 12-110V LED Work Light with Trapezoid Beam Pattern



Part Number 1403281 12-110V LED Work Light with Spot Beam Pattern



Part Number 1403291 12-110V LED Work Light with Flood Beam Pattern



Part Number 1403481 12-24V LED Heated Work Light with Spot Beam Pattern



Part Number 1403491 12-24V LED Heated Amber Work Light with Flood Beam Pattern

Print date: 2020-04-24 © 2020 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

